

LAN CABLE U/UTP CAT 6

CM-005-CPR

CPR CERTIFIED
CONSTRUCTION PRODUCTS REGULATION

CPR Regulation [EU] n° 305/2011

Jacket
PVC


Core
COPPER

Category
6

Type
U/UTP

Conductor
24 AWG

Length
305m

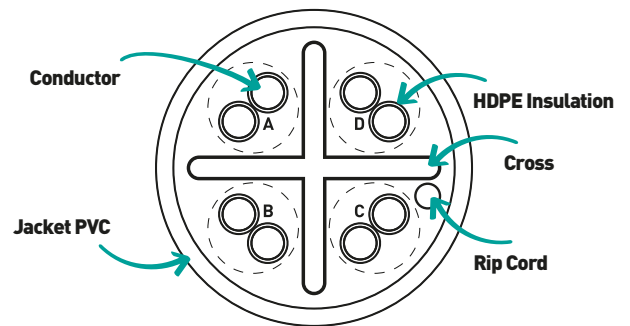

General

Cable type	Solid
Cable length	305m
Cable category	6

Conductor

Conductor	0.50mm / 24AWG
Work datapass	140-160m
Structure	4x2x0.50mm

Insulation

Material	HDPE
PE OD	Ø 0.98 ± 0.05mm

Outer jacket

Material	PVC
Average Thickness	0.56mm ± 0.3mm
Diameter	5.7mm ± 0.3mm
Color	Gray
Separator	Polyethylene

Electrical features

Conductor resistance Ω/100m.20°C	≤9Ω
Conductor allow load current (A)	0.5A
Voltage rating(V)	≤30V
Operating temperature (°C)	-25°C to 70°C