


LAN CABLE U/UTP CAT 5e

CM-001-CPR

CPR CERTIFIED
CONSTRUCTION PRODUCTS REGULATION
CPR Regulation (EU) n° 305/2011

Jacket	Conductor	Category
PVC	24 AWG	5e
Type	Length	
U/UTP	305m	

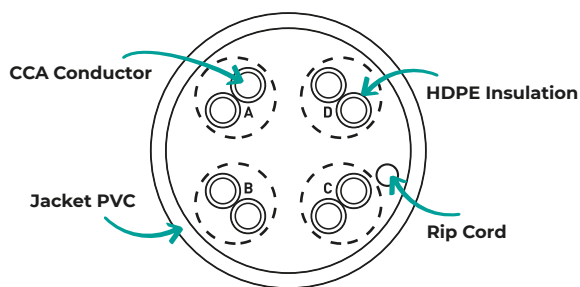

General

Cable type	Solid
Cable length	305m
Cable category	5e

Conductor

Conductor	0.5mm / 24AWG
Structure	4 x 2 x 0.50mm

Insulation

Material	HDPE
PE OD	$\varnothing 0.91 \pm 0.05\text{mm}$

Outer jacket

Material	PVC
Average Thickness	$0.55 \pm 0.02\text{mm}$
Diameter	$5.0\text{mm} \pm 0.2\text{mm}$

Electrical features

Conductor resistance @/305m.20°C	$\leq 80\Omega$
Conductor allow load current (A)	0.5A
Voltage rating (V)	$\leq 30\text{V}$
Operating temperature (°C)	$-25^\circ\text{C} \sim 75^\circ\text{C}$