

LAN CABLE

U/UTP CAT 5e

CM-022-CPR

CPR CERTIFIED

CONSTRUCTION PRODUCTS REGULATION

CPR Regulation (EU) n° 305/2011


Jacket
PVC

Conductor
24 AWG

Category
5e

Type
U/UTP

Length
100m

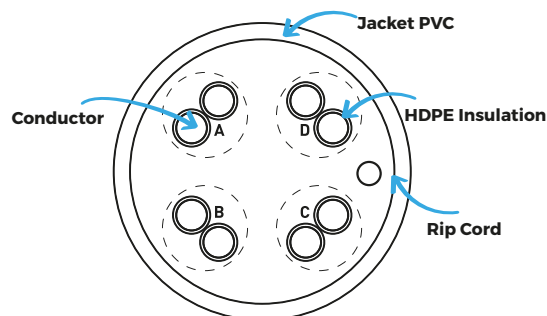

General

Cable type	Solid
Cable length	100m
Cable category	5e

Conductor	0.5mm / 24AWG
Conductor	4x2x0.50mm
Structure	

Insulation	HDPE
Material	$\varnothing 0.91 \pm 0.05\text{mm}$
PE OD	PVC
Outer jacket	$0.51\text{mm} \pm 0.03\text{mm}$
	$5.0\text{mm} \pm 0.2\text{mm}$

Material	
Average Thickness	$\leq 27\Omega$
Diameter	0.5A

	$\leq 30\text{V}$
Electrical features	-25°C to 70°C

Conductor resistance $\Omega/100\text{m}.20^{\circ}\text{C}$	
--	--

Conductor allow load current (A)	
----------------------------------	--

Voltage rating (V)	
--------------------	--

Operating temperature ($^{\circ}\text{C}$)	
--	--